


## LHR Series High Rate LHR12300W(12V300W)

### Specifications

Rated Voltage	12V	
Nominal Rate ( $W_{15}$ , 1.67V/cell)	300W	
Nominal Capacity( $C_{10}$ , 1.80V/cell)	75Ah	
Dimension	Length	256±2mm (10.08 inches)
	Width	173±2mm (6.81 inches)
	Container Height	213±2mm (8.39 inches)
	Total Height	216±2mm (8.50 inches)
Approx. Weight	23.4 Kg (51.59 lbs)	
Terminal	M8	
Container Material	ABS(UL94 V-0)	
Rated Capacity (25°C)	75.0 Ah	(10hr, 7.50A, 1.80V/cell)
	71.6 Ah	(8hr, 8.95A, 1.80V/cell)
	62.5 Ah	(5hr, 12.5A, 1.75V/cell)
	53.4 Ah	(3hr, 17.8A, 1.75V/cell)
	46.9 Ah	
Max. Discharge Current	1200A	
Internal Resistance (25°C)	Approx. 5.0mΩ	
Operating Temp. Range	Discharge	-20 ~ 55°C (4 ~ 131°F)
	Charge	0 ~ 40°C (32 ~ 104°F)
	Storage	-15 ~ 50°C (5 ~ 122°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max. Charging Current(25°C)	18.75A	
Charge voltage(25°C)	Float	13.5V
	Temp. Coefficient	-3mV/cell/°C
	Equalization	14.1~14.4V
Effect of temp. to Capacity	40°C (104°F)	106%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	≤3%/month @ 25°C	



### Layout

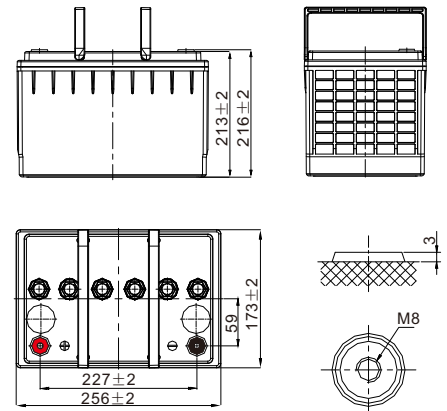

### Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h
1.85V/cell	232.1	172.0	136.9	106.8	65.0	46.7	36.8	26.0	21.6	16.1	13.4	11.7	8.72	7.36
1.80V/cell	258.7	191.7	152.5	119.0	70.0	50.5	39.8	28.1	23.0	17.1	14.1	12.2	8.95	7.50
1.75V/cell	269.9	200.1	159.2	124.2	75.2	53.6	42.2	29.7	24.2	17.8	14.4	12.5	9.11	7.57
1.70V/cell	273.3	202.6	161.2	125.7	82.8	57.9	44.9	31.6	25.0	18.3	14.8	12.7	9.23	7.65
1.67V/cell	288.0	207.9	163.6	127.6	88.4	60.9	46.9	33.0	25.7	18.7	15.2	13.0	9.37	7.72
1.60V/cell	306.0	215.1	166.1	129.6	89.1	61.8	47.6	33.4	26.3	19.1	15.5	13.2	9.49	7.80

### Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h
1.85V/cell	380.0	315.4	250.9	195.7	127.9	92.8	73.6	52.9	43.3	32.5	27.1	23.7	17.8	15.1
1.80V/cell	429.5	351.5	279.6	236.7	137.1	99.9	79.2	56.9	46.1	34.4	28.4	24.7	18.2	15.3
1.75V/cell	462.9	366.8	291.8	247.0	146.4	105.5	83.8	60.1	48.2	35.6	29.0	25.2	18.5	15.5
1.70V/cell	491.9	371.4	295.5	250.0	160.4	113.2	88.4	63.4	49.7	36.7	29.8	25.7	18.7	15.6
1.67V/cell	510.0	377.1	300.0	253.9	166.6	118.2	91.8	65.8	51.0	37.3	30.4	26.1	19.0	15.7
1.60V/cell	517.3	382.8	304.5	257.7	169.5	118.9	92.5	66.2	51.7	37.9	30.8	26.5	19.2	15.8

## LHR Series High Rate LHR12300W(12V300W)

### Applications

- UPS
- Hospitals & Testing Laboratories
- Emergency Power Supply
- Industrial Process Control Facilities
- Banks & Financial Markets
- Data & Network Operation Centers


### General Features

- ABS material: UL94 V-0
- Oxygen recombination efficiency:  $\geq 98\%$
- High quality AGM separator: extend cycle life and prevent micro short circuit
- Unique vent valve design: reduce water losing and prevent air/spark going inside
- PbCaSn alloy for plate grids: less gassing, less self-discharging


### Standards

- Compliance with IEC 60896 standards
- Classified as "Long Life" according to Eurobat
- CE, UL Certified
- Manufactured in Leoch@IATF16949, OHSAS 18001, ISO 9001 and ISO 14001 certified production facilities


### Discharge Characteristics

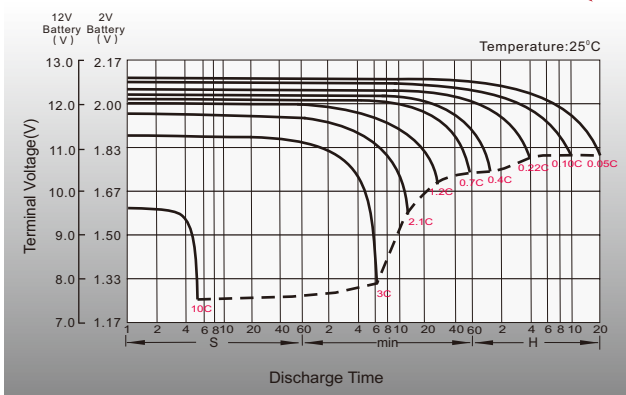

### Float Charging Characteristics

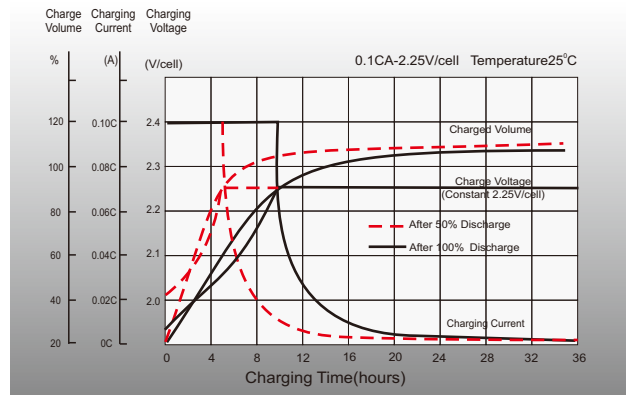

### Temperature Effects in Relation to Battery Capacity

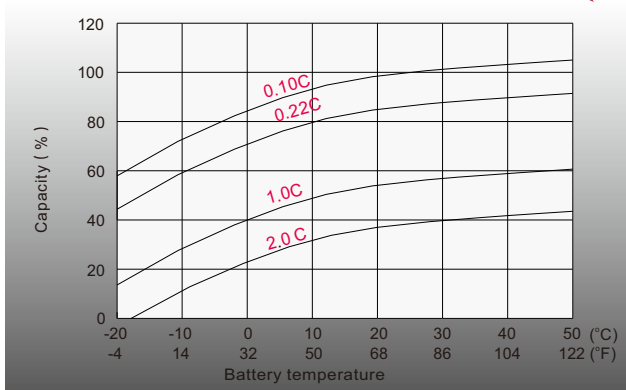

### Temperature Effects on Long Term Float Life

