

Thin Plate Pure Lead

PLX12-400FT(A) (12V405W)


PLX SERIES
HIGH RATE

Specification

Nominal Voltage	12V	
Power (Watts)	405W	(15min, 1.67V/cell, 25°C)
Rated Capacity (Ah)	100Ah	(C ₁₀ , 1.80V/cell, 25°C)
Dimension	Length	405.4mm (15.96 inches)
	Width	108mm (4.25 inches)
	Container Height	287mm (11.30 inches)
	Total Height (with Terminal)	287mm (11.30 inches)
Weight	31.5Kg (69.4 lbs)	
Terminal	M6	
Container Material	PC-ABS flame retardant jar and cover to UL94V-0	
Max. Discharge Current	1200A (5s)	
Internal Resistance	Approx 4.4mΩ	
Operating Temp. Range	Discharge	-40°C ~ 65°C (-40°F ~ 149°F)
	Charge	0°C ~ 40°C (32°F ~ 104°F)
	Storage	-20°C ~ 40°C (-4°F ~ 104°F)
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%

Storage

PLX series batteries can be stored up to 24 months at 25°C(77°F), For higher temperatures the time interval will be shorter. Battery needs to be given a freshening charge when the OCV approach 2.10V/cell or when the maximum storage time is reached, whichever occurs first.

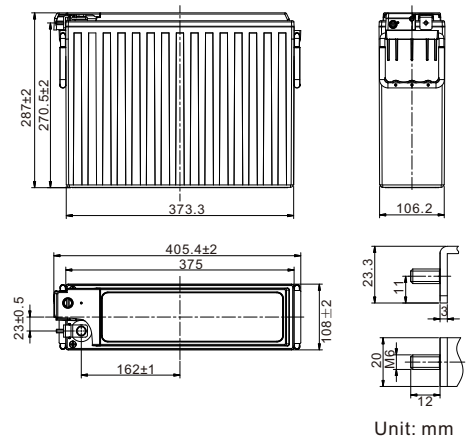

Constant Current Discharge (Amperes) at 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	303.6	228.6	184.3	153.9	113.6	80.0	61.9	34.1	24.7	19.8	16.7	11.7	9.79	5.10
1.80V/cell	329.6	242.8	193.4	159.9	118.4	82.7	63.9	35.2	25.4	20.4	17.2	11.9	10.0	5.20
1.75V/cell	350.9	255.6	200.4	166.2	122.4	85.2	65.8	36.1	25.9	20.7	17.5	12.1	10.1	5.24
1.70V/cell	373.3	263.7	207.5	171.6	126.6	88.0	67.7	36.9	26.4	21.0	17.7	12.2	10.1	5.28
1.67V/cell	390.0	274.8	213.0	177.3	132.0	91.3	70.0	37.9	26.9	21.4	17.9	12.3	10.2	5.31
1.60V/cell	410.0	279.4	225.0	185.1	135.0	93.7	71.7	38.6	27.3	21.7	18.1	12.4	10.3	5.35

Constant Power Discharge (Watts/cell) at 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	569.0	438.9	357.7	299.5	222.7	158.3	122.8	68.0	49.4	39.7	33.6	23.7	19.9	10.4
1.80V/cell	611.0	461.2	372.9	309.2	230.6	162.3	126.0	69.9	50.6	40.7	34.5	24.1	20.3	10.6
1.75V/cell	642.4	480.1	382.6	318.4	236.4	166.1	128.9	71.4	51.3	41.2	34.9	24.3	20.4	10.6
1.70V/cell	667.2	491.6	392.2	325.7	242.5	170.5	131.8	72.5	52.1	41.7	35.2	24.5	20.4	10.7
1.67V/cell	670.0	501.2	405.0	333.0	245.0	176.0	135.5	74.1	52.9	42.2	35.6	24.6	20.5	10.7
1.60V/cell	710.0	506.1	410.0	343.9	250.0	178.8	137.7	75.0	53.5	42.6	35.7	24.7	20.6	10.7

Thin Plate Pure Lead

Applications

- UPS (High rate)
- High power backup supply
- Emergency power supply
- Starting system
- Power tools
- Emergency lighting
- Electrical starting


General Features

- 15 years design life(25°C)
- Long Shelf Life up to 2 years @25°C(77°F)
- Premium ABS+PC jar & covers, Flame Retardant to UL94V-0
- High-rate performance, high energy density
- Virgin pure lead plates / copper alloy terminal inserts
- High quality AGM separators minimize electrical resistance to allow high current discharging properties


Standards

- IEC 60896 Certified
- Classified as "Very Long Life" according to Eurobat
- UL Recognized
- Approved as non-hazardous cargo for ground, sea and air transportation in accordance with ICAO, IATA and IMDG
- Manufactured in Leoch@TS16949, ISO 9001, ISO 14001 and OHSAS 18001 certified production facilities


Discharging Characteristics

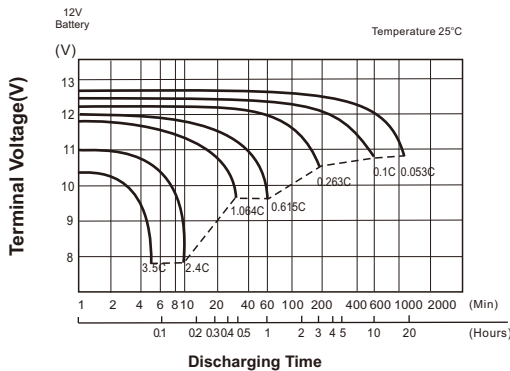

Charging Characteristics

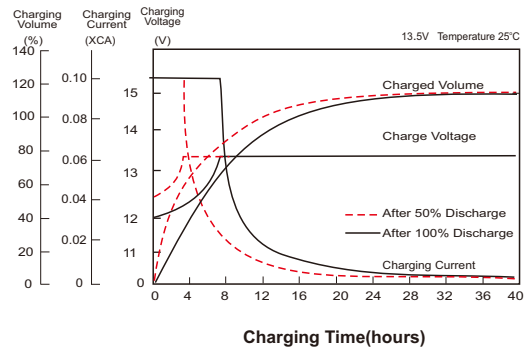

Effect of Temperature on Discharging Time

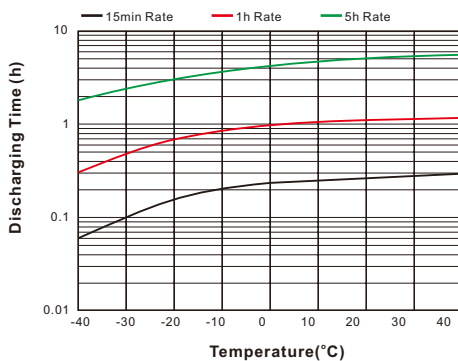

Self Discharge Characteristics

